


TRACK SYSTEM


22 30 42

APPLICATIONS


- The standard track is used for cars adjusted with control lines and for self-tacking systems.
- The pinstop track is used for pinstop genoa cars. Pinstop is a spring loaded plunger fixing the genoa car on the purpose made track. The car is easy to relocate when not under load.
- The high beam track is used for unsupported main sheet systems and self tacking systems.




TRACK Standard 22, 30, 42



TRACK Pinstop 22, 30, 42



TRACK Sliding bolt 22, 30, 42



TRACK High beam 22, 30, 42

TRACK 22

Length mm	Standard Art. no.	Pinstop Art. no.	Sliding bolt Art. no.	High beam Art. no.
1000	442-001-01	442-002-01	-	-
1200	442-001-02	442-002-02	-	-
1500	442-001-03	442-002-03	-	442-011-03
2000	442-001-04	442-002-04	442-003-04	442-011-04
2500	442-001-05	442-002-05	-	-
3000	442-001-06	442-002-06	442-003-06	-
3500	442-001-07	442-002-07	-	-
4000	442-001-08	442-002-08	442-003-08	442-011-08
6000	442-001-09	442-002-09	-	-
Weight Kg/m	0.43	0.40	0.45	1.07
Width/Height mm	22/13	22/13	22/13	26/35
Wx/Wy cm³	0.57/0.38	0.57/0.38	0.64/0.36	2.10/2.76
Ix/Iy cm⁴	0.63/0.28	0.63/0.28	0.70/0.27	2.73/4.83
Screw size	M5		M5	M6
Hole spacing	100	100	-	-

TRACK 30



Length mm	Standard Art. no.	Pinstop Art. no.	Sliding bolt Art. no.	High beam Art. no.
1000	443-001-01	443-002-01	-	-
1200	443-001-02	443-002-02	-	-
1500	443-001-03	443-002-03	-	443-011-03
2000	443-001-04	443-002-04	443-003-04	443-011-04
2500	443-001-05	443-002-05	-	-
3000	443-001-06	443-002-06	443-003-06	-
3500	443-001-07	443-002-07	-	-
4000	443-001-08	443-002-08	443-003-08	443-011-08
6000	443-001-09	443-002-09	-	-
Weight Kg/m	0.89	0.86	0.81	2.62
Width/Height mm	30/17	30/17	30/17	42/62
Wx/Wy cm³	1.66/1.07	1.66/1.07	1.59/0.92	8.4/12.9
Ix/Iy cm⁴	2.48/0.97	2.48/0.97	2.38/0.88	17.7/42.8
Screw size	M6		M6	M8
Hole spacing	100	100	-	-

TRACK 42

Length mm	Standard Art. no.	Pinstop Art. no.	Sliding bolt Art. no.	High beam Art. no.
1000	-	-	-	-
1200	-	-	-	-
1500	444-001-03	444-002-03	-	-
2000	444-001-04	444-002-04	444-003-04	444-011-04
2500	444-001-05	444-002-05	-	444-011-05
3000	444-001-06	444-002-06	444-003-06	-
3500	444-001-07	444-002-07	-	-
4000	444-001-08	444-002-08	444-003-08	444-011-08
6000	444-001-09	444-002-09	-	-
Weight Kg/m	1.65	1.65	1.65	4.47
Width/Height mm	42/22	42/22	42/22	58/85
Wx/Wy cm³	4.47/2.62	4.47/2.62	4.43/2.35	19.2/33
Ix/Iy cm⁴	9.39/3.11	9.39/3.11	9.31/2.88	55.8/147
Screw size	M10	M10	M8	M10
Hole spacing	100	100	-	-

UPGRADING TO NEW TRACKS

The sliding bolt track is ideal for retrofit upgrades. The fasteners can be located according to the existing bolt holes. This track is also used for applications where the bolts are to be hidden.

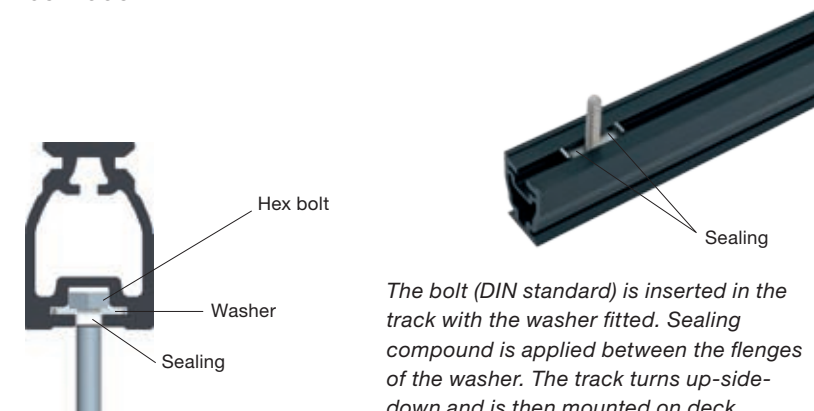

The bolt (DIN standard) is inserted in the track with the washer fitted. Sealing compound is applied between the flanges of the washer. The track turns up-side-down and is then mounted on deck.

SEALING WASHER

Art. no.	Description	Track Art. no.
164-481	Washer M5 Sliding bolt	442-003-0X
164-482	Washer M6 Sliding bolt	442-011-0X 443-003-0X
164-483	Washer M8 Sliding bolt	443-011-0X 444-003-0X
164-484	Washer M10 Sliding bolt	444-011-0X

For curved tracks, please contact Seldén.

Fasteners not included.